




Fitting Instructions for RAD0116 Radiator Guards Ducati Street Fighter 2012-



In This Kit There Should Be
2x Radiator Guards (upper and lower).
4x 100mm Lengths of self-adhesive Foam.
1 x M6 nyloc nut.
1x M6 Washer
1 x M6x35mm long button headed bolt.

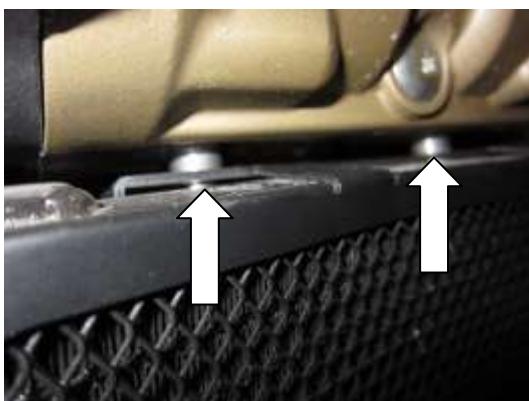

Picture 1



Picture 2

To fit the lower radiator guard

- Cut the foam strip provided into 10mm wide pieces and stick them to the back of both radiator guard frames, so that they sit between the radiator guard and the radiator.
- From underneath the lower radiator guard undo and loosen the two bolts arrowed in picture 1.
- Place the lower radiator guard into position so the upper mounting flanges fit between the radiator and the spacers as shown in picture 1.
- Use the bolt and nut from kit secure the lower mount as shown in picture 2.

R&G Racing

Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0) 1420 89007 Fax : +44 (0) 1420 87301 Email: info@rg-racing.com



- Tighten all three bolts.



Picture 3



Picture 4



Picture 5



Picture 6

To fit the upper radiator guard

- Remove the two bolts arrowed in pictures 3 and 4.
- Remove the spacer/bolt arrowed in picture 5.
- Place the radiator guard into position and secure the top mounts as shown in pictures 3 and 4.
- Reuse the original spacer/bolt and secure the lower mount as shown in picture 6

Issue 1 13/04/2012 (NSY)

R&G Racing
Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0) 1420 89007 Fax : +44 (0) 1420 87301 Email: info@rg-racing.com



Notice de montage
RAD0116 Grille de protection radiateur
Ducati Street Fighter 2012-



Le kit doit contenir:
2x grilles de protection radiateur (supérieur et inférieur).
2x 100mm Longueurs de mousse autocollante
1 x M6 écrou en nyloc
1x M6 Rondelles
1 x M6x35mm Long boulon à tête ronde

Installation de la protection inférieure

- Couper la mousse autocollante en longueur de 10mm puis collez les au bas de chaque cadre support de la protection, de sorte à ce qu'elles soient placées entre la protection radiateur et le radiateur.
- A partir du dessous de la protection de radiateur inférieure, Desserrer les 2 boulons (photo 1).
- Placer la grille de protection inférieure en position de façon à ce que la partie supérieure des brides de montage se mette entre le radiateur et et les entretoises (photo 1).
- Utiliser le boulon et l'écrou du kit pour fixer le support inférieur (photo 2).
- Serrer les 3 boulons.

Installation de la protection supérieure

- Enlever les 2 boulons (photo 3 et 4).
- Enlever l'entretoise/boulon (photo 5).
- Mettre la grille de protection en position puis fixer les supports du haut (photo 3 et 4).
- Réutiliser l'entretoise/boulon et fixer le support inférieur (photo 6).

Issue 1 13/04/2012 (NSY)

R&G Racing
Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0) 1420 89007 Fax : +44 (0) 1420 87301 Email: info@rg-racing.com



Montageanleitung für den RAD0116 Kühlerschutz Ducati Street Fighter Modell 2012-



Dieser Kit beinhaltet:

2x Kühlerschutz (oben und unten)
2x 100mm selbstklebende Schaumstoffstreifen
1x M6x35mm Halbrundkopfschraube
1x M6 Dichtung
1x M6 selbstsichernde Mutter

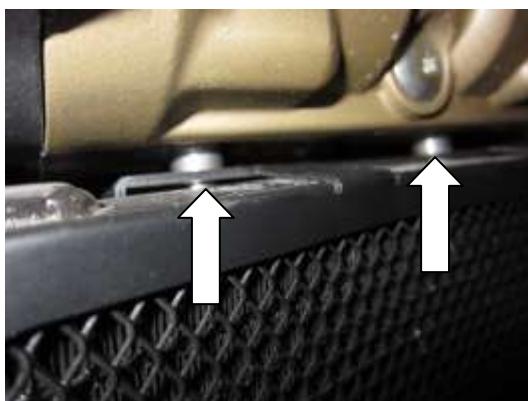


Abbildung 1



Abbildung 2

Montageanleitung für den oberen Kühlerschutz:

- Schneiden Sie zuerst die mitgelieferten Schaumstoff-Streifen in 10 mm breiten Streifen und kleben Sie diese auf der Rückseite des Kühlerschutz-Rahmens, so dass sie zwischen dem Kühlerschutz und dem Kühler angebracht sind.

R&G Racing
Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0) 1420 89007 Fax : +44 (0) 1420 87301 Email: info@rg-racing.com



- Lösen Sie die zwei Schrauben, die in Abbildung 1 markiert sind, von unter dem unteren Kühlerschutz.
- Den unteren Kühlerschutz in Position halten, so dass die oberen Montagekanten zwischen dem Kühler und den Abstandhaltern passen (wie in Abbildung 1 abgebildet).
- Verwenden Sie die Schraube und die Mutter vom Kit, um die untere Halterung zu befestigen (siehe Abbildung 2).
- Ziehen Sie alle drei Schrauben fest.



Abbildung 3



Abbildung 4



Abbildung 5



Abbildung 6

Montageanleitung für den oberen Kühlerschutz:

- Entfernen Sie die zwei Schrauben, die in Abbildungen 3 und 4 markiert sind.
- Entfernen Sie den Abstandhalter / die Schraube in Abbildung 5.
- Den Kühlerschutz in Position bringen und mit den oberen Montagehaltern befestigen (wie in Abbildungen 3 und 4 abgebildet).
- Montieren Sie die Originalschraube und den Original-Abstandhalter, um den unteren Halter zu befestigen (wie in Abbildung 6 abgebildet).

R&G Racing
Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0) 1420 89007 Fax : +44 (0) 1420 87301 Email: info@rg-racing.com



CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing
Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0) 1420 89007 Fax : +44 (0) 1420 87301 Email: info@rg-racing.com