



LP0331

FITTING INSTRUCTIONS FOR LP0331BK LICENCE PLATE BRACKET
LEXMOTO CYPHER 2021-



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS OR
HAVE FITTED BY A QUALIFIED TECHNICIAN.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE WAY OF
MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,
THESE RUBBER WASHERS CAN BE THROWN AWAY.

DIGITAL COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FROM:

WWW.RG-RACING.COM

R&G, Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
<ul style="list-style-type: none">• ALLEN KEY SET TO INCLUDE 3, 4, 5 and 6mm.• HEAT GUN OR LIGHTER.• CABLE CUTTERS.• SOCKET SET TO INCLUDE 6 & 10mm SOCKETS AND WRENCH.	M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm M8 BOLT = 20Nm M10 BOLT = 40Nm M12 BOLT = 40Nm


LEGEND


ITEM NO.	DESCRIPTION	QTY
ITEM 1	TB0331 - LICENSE PLATE BRACKET	1
ITEM 2	LA0002 - NUMBER PLATE LIGHT (W/SHROUD)	1
ITEM 3	CON0004 - LICENCE PLATE LIGHT CONNECTOR	1
ITEM 4	666-896 - 200mm LENGTH OF HEAT SHRINK	1
ITEM 5	CT75 - 75mm CABLE TIE	2
ITEM 6	CLIP1 - SELF ADHESIVE CLIP	2
ITEM 7	REFL3 - REFLECTOR	1



LP0331

FITTING DIAGRAM

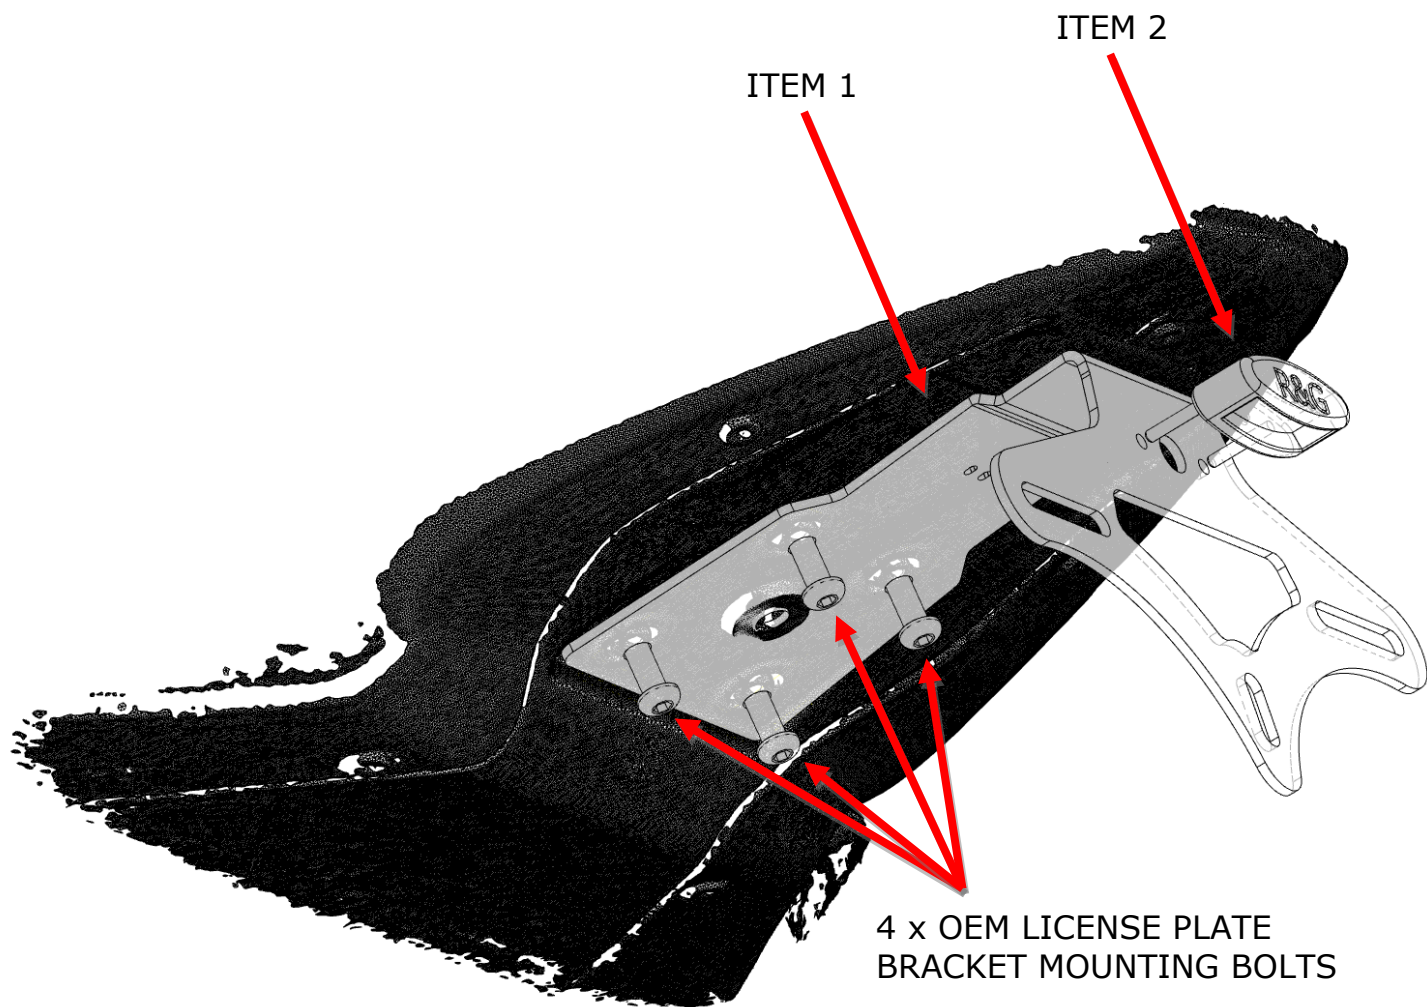

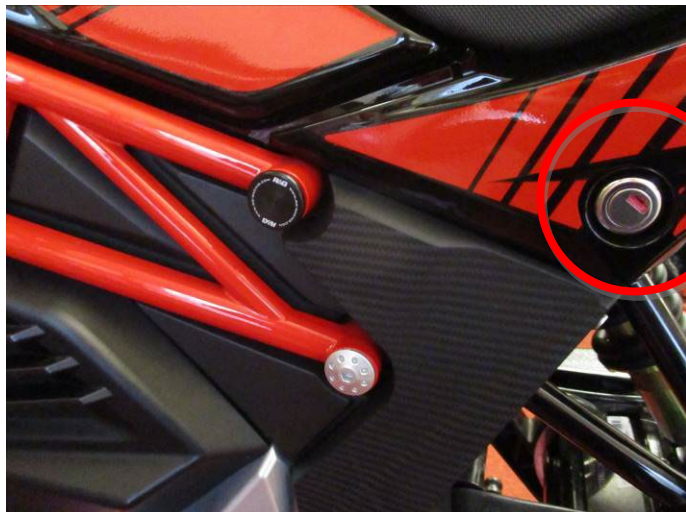

Picture 1



Picture 2

FITTING INSTRUCTIONS

OEM Tail Tidy Removal

- To fit the R&G tail tidy, remove the seat and pillion seat using the key as shown in **Picture 1**.
- In order to remove the OEM license plate bracket and mount, remove the 4 bolts which secure this to the underside of the tail of the motorcycle.
- By doing this, the license plate bracket will be loose from the bike and have a cable connected to the bike under the seat, disconnect this, it is the license plate illuminator connector and will be used to later connect to our replacement unit (**ITEM 2**).

Tail Tidy Fitting

- Line the R&G tail tidy to the original mounting holes as shown in **Fitting Diagram**.
- Using the 4 x original license plate bracket bolts, fasten the license plate bracket as shown in **Picture 2**.
- Now, using the cable ties provided, tidy the number plate illuminator cable using the slots in the R&G tail tidy bracket and thread the cable through the hole in the tail tidy bracket which will then present itself inside the cavity under the riders seat.
- Re-connect the license plate illuminator using the OEM connectors and test this prior to riding the vehicle.
- **IMPORTANT: IF FITTING A FULL-SIZE LICENCE PLATE AND PLACING IT FAR DOWN ON THE LICENCE PLATE HANGER, THERE IS A SMALL CHANCE OF THE LICENCE PLATE HITTING THE BACK WHEEL UNDER HEAVY LOAD AND OVER LARGE BUMPS IN THE ROAD. IT IS YOUR RESPONSIBILITY TO CHECK FOR THIS POSSIBILITY AND TAKE AVOIDING ACTION. FAILURE TO CHECK THIS COULD RESULT IN SERIOUS INJURY.**
- Depending on local laws, attach enclosed reflector (**ITEM 7**) in an appropriate location.
- Test the license plate illuminator and all lights before riding.



ISSUE 1 24/01/21 (AO)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



LP0331

NOTICE DE MONTAGE POUR LP0331BK SUPPORT DE PLAQUE
LEXMOTO CYPHER 2021-



CE KIT CONTIENT LES ARTICLES ILLUSTRÉS ET ÉTIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ÊTRE PRÉSENTES UNIQUEMENT POUR LA CLARTÉ DES INSTRUCTIONS.

NE PAS PROCÉDER AU MONTAGE TANT QUE VOUS N'ÊTES PAS SÛR QUE TOUTES LES PIÈCES SOIENT PRÉSENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

**EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ UN DE NOS
REVENDEURS OU FAITES APPEL A UN TECHNICIEN QUALIFIÉ.**

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLÉ NE REPRÉSENTE PAS NECESSAIREMENT LA
MANIÈRE DE LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISÉES POUR MAINTENIR LES COMPOSANTS SUR LES
BOULONS, ELLES PEUVENT ÊTRE JETÉES.

NOTICE DISPONIBLE AU TÉLÉCHARGEMENT SUR :
WWW.RG-RACING.COM



<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE</u>
<ul style="list-style-type: none">• CLÉS ALLEN 3, 4, 5 et 6mm.• PISTOLER À CHALEUR OU BRIQUET.• PINCE COUPANTE.• CLÉ À CLIQUET + DOUILLES 6 & 10mm.	M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm M12 BOULON = 40Nm


LÉGENDE

ARTICLE NO.	DESCRIPTION	QTÉ
ARTICLE 1	TB0331 - LICENSE PLATE BRACKET	1
ARTICLE 2	LA0002 - NUMBER PLATE LIGHT (W/SHROUD)	1
ARTICLE 3	CON0004 - LICENCE PLATE LIGHT CONNECTOR	1
ARTICLE 4	666-896 - 200mm LENGTH OF HEAT SHRINK	1
ARTICLE 5	CT75 - 75mm CABLE TIE	2
ARTICLE 6	CLIP1 - SELF ADHESIVE CLIP	2
ARTICLE 7	REFL3 - REFLECTOR	1



LP0331

FITTING DIAGRAM

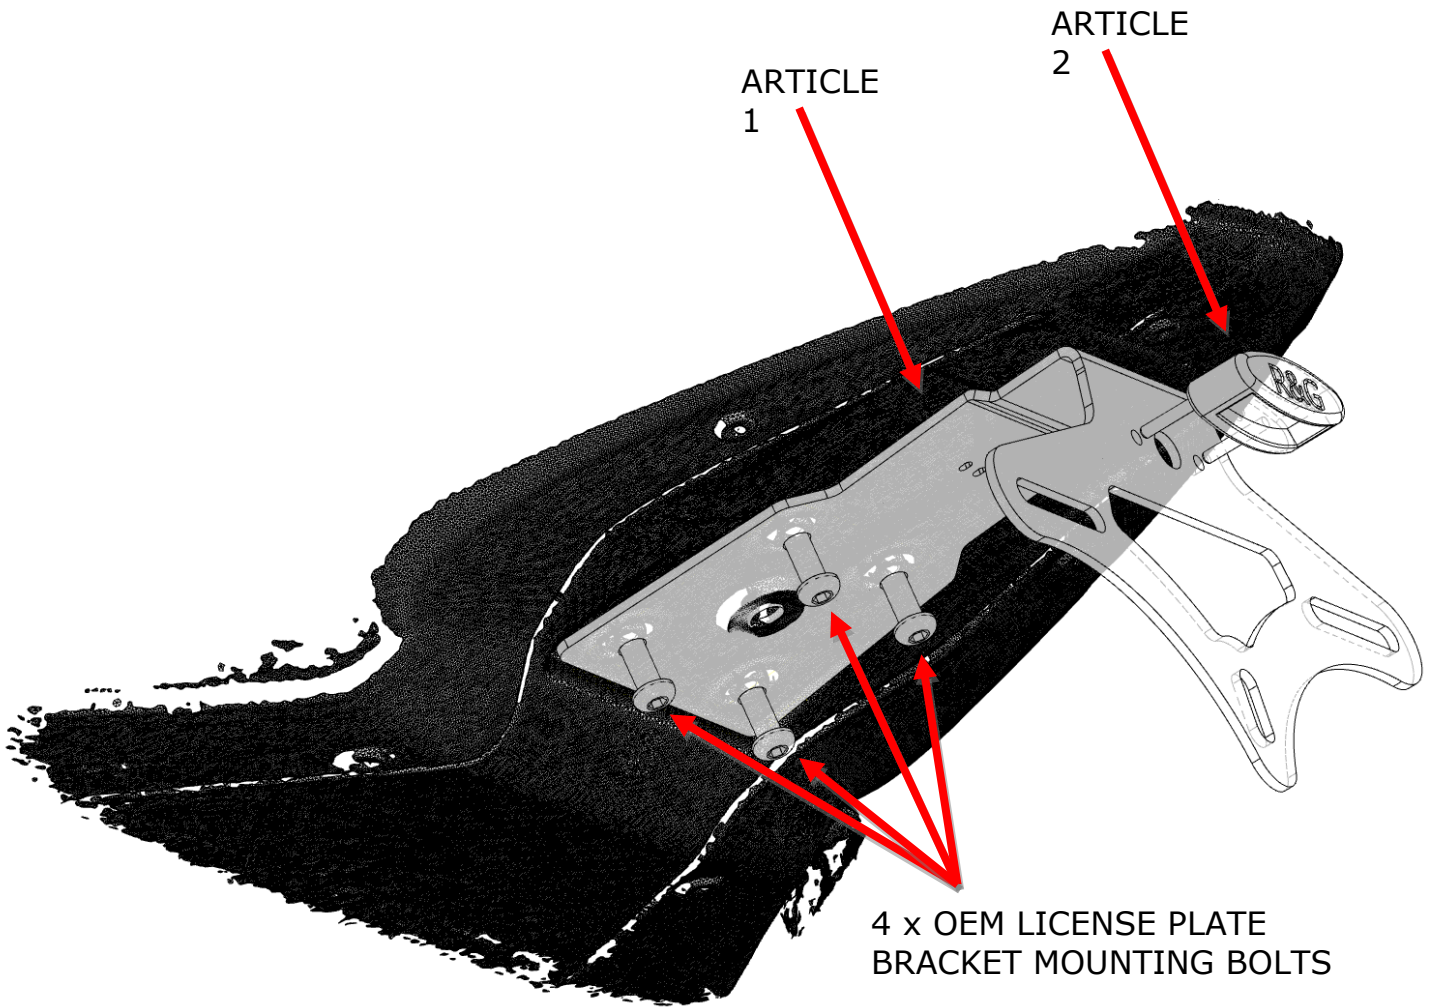

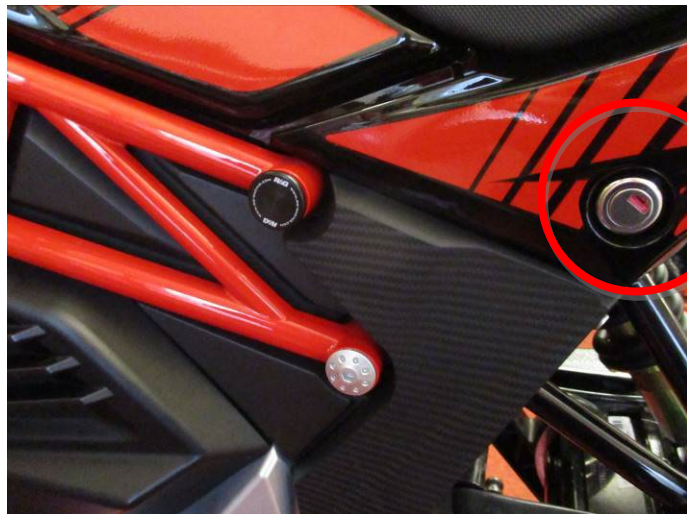


Photo 1



Photo 2

NOTICE DE MONTAGE

Enlever le support d'origine

- Pour installer le support arrière R&G, retirez la selle et la selle passager à l'aide de la clé comme indiqué sur la photo 1.
- Afin de retirer le support et le support de plaque d'immatriculation d'origine, retirez les 4 boulons qui le fixent au-dessous du support de la moto.
- En faisant cela, le support de plaque d'immatriculation sera détaché de la moto et aura un câble connecté à la moto sous le siège, déconnectez-le, c'est le connecteur de feu de plaque d'immatriculation et sera utilisé pour se connecter plus tard à notre unité de remplacement (**ARTICLE 2**).

Montage du support de plaque

- Alignez le support arrière R&G sur les trous de montage d'origine, comme indiqué sur le schéma de montage.
- À l'aide des 4 boulons de support de plaque d'immatriculation d'origine, fixez le support de plaque d'immatriculation comme indiqué sur la photo 2.
- Maintenant, à l'aide des serre-câbles fournis, rangez le câble de l'éclairage de la plaque d'immatriculation en utilisant les fentes du support de rangement arrière R&G et faites passer le câble à travers le trou du support arrière qui se présentera alors à l'intérieur de la cavité sous la selle du pilote.
- Reconnectez l'éclairage de la plaque d'immatriculation à l'aide des connecteurs d'origine et testez-le avant d'utiliser la moto.
- **IMPORTANT** : SI VOUS INSTALLEZ UNE PLAQUE D'IMMATRICULATION DE GRANDE TAILLE ET LA PLACEZ LOIN VERS LE BAS SUR LE SUPPORT DE PLAQUE D'IMMATRICULATION, IL Y A UNE FAIBLE CHANCE QUE LA PLAQUE D'IMMATRICULATION FRAPPE LA ROUE ARRIÈRE SOUS L'EFFET D'UNE CHARGE LOURDE ET SUR DE GRANDES BOSSES SUR LA ROUTE. IL EST DE VOTRE



RESPONSABILITÉ DE VÉRIFIER CETTE POSSIBILITÉ ET DE PRENDRE DES MESURES POUR L'ÉVITER. NE PAS VÉRIFIER CECI POURRAIT ENTRAÎNER DES BLESSURES GRAVES.

- Selon les lois locales, fixez le réflecteur fourni (article 7) à un endroit approprié.
- Testez l'éclairage de la plaque d'immatriculation et tous les feux avant de rouler.

ISSUE 1 24/01/21 (AO)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



LP0331

MONTAGEANLEITUNG FÜR LP0331BK KENNZEICHENHALTER
LEXMOTO CYPHER 2021-



ALLE KIT-TEILE SIND AUF DEN NACHFOLGENDEN SEITEN ABGEBILDET UND GEKENNZEICHNET.

DIE ABGEBILDETEN TEILE DIENEN LEDIGLICH ZUR ERKLÄRUNG.

ÜBERPRÜFEN SIE ZUERST, DASS ALLE TEILE VORHANDEN SIND.

LESEN SIE DIE MONTAGEANLEITUNG KOMPLETT DURCH, BEVOR SIE ANFANGEN.

**WENN SIE BEI DER MONTAGE DIESES PRODUKTES UNSICHER SIND, BITTE EINEN
UNSERER HÄNDLER KONTAKTIEREN ODER DAS KIT VON EINEM QUALIFIZIERTEN
ZWEIRAD-MECHANIKER MONTIEREN LASSEN.**

DIE VERPACKUNG DER TEILE STELLT NICHT DIE REIHENFOLGE DER MONTAGE DAR.

HINWEIS FÜR KITS MIT PLASTIKUNTERLEGSCHLEIBEN AN DEN SCHRAUBEN –
DIESE PLASTIK-UNTERLEGSCHLEIBEN WERDEN NICHT FÜR DEN EINBAU BENÖTIGT.

**EINE DIGITALE VERSION DIESER MONTAGEANLEITUNG KANN AUF FOLGENDER
SEITE HERUNTERGELADEN WERDEN:**

[WWW.RG-RACING.COM](http://www.rg-racing.com)

R&G, Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



<u>SIE BENÖTIGEN FOLGENDES WERKZEUG</u>	<u>ALLGEM. ANZUGSDREHMOMENT</u>
<ul style="list-style-type: none">• SATZ INBUSSCHLÜSSEL INKL. 3, 4, 5, 6mm• HEISLUFTPISTOLE ODER FEUERZEUG• SEITENSCHNEIDER• STECKSCHLÜSSELSATZ INKL. 6 & 10mm	M4 SCHRAUBE = 8Nm M5 SCHRAUBE = 12Nm M6 SCHRAUBE = 15Nm M8 SCHRAUBE = 20Nm M10 SCHRAUBE = 40Nm M12 SCHRAUBE = 40Nm

LIEFERUMFANG

ARTIKEL NR.	BESCHREIBUNG	MENGE
ARTIKEL 1	TB0331 - KENNZEICHENHALTER	1
ARTIKEL 2	LA0002 - KENNZEICHENBELEUCHTUNG (MIT ABDECKUNG)	1
ARTIKEL 3	CON0004 - VERBINDUNG KENNZEICHENBELEUCHTUNG	1
ARTIKEL 4	666-896 - 200mm SCHRUMPFSCHLAUCH	1
ARTIKEL 5	CT75 - 75mm KABELBINDER	2
ARTIKEL 6	CLIP1 - SELBSTKLEBENDER KABELCLIP	2
ARTIKEL 7	REFL3 - RÜCKSTRAHLER	1



LP0331

ZEICHNUNG MONTAGE

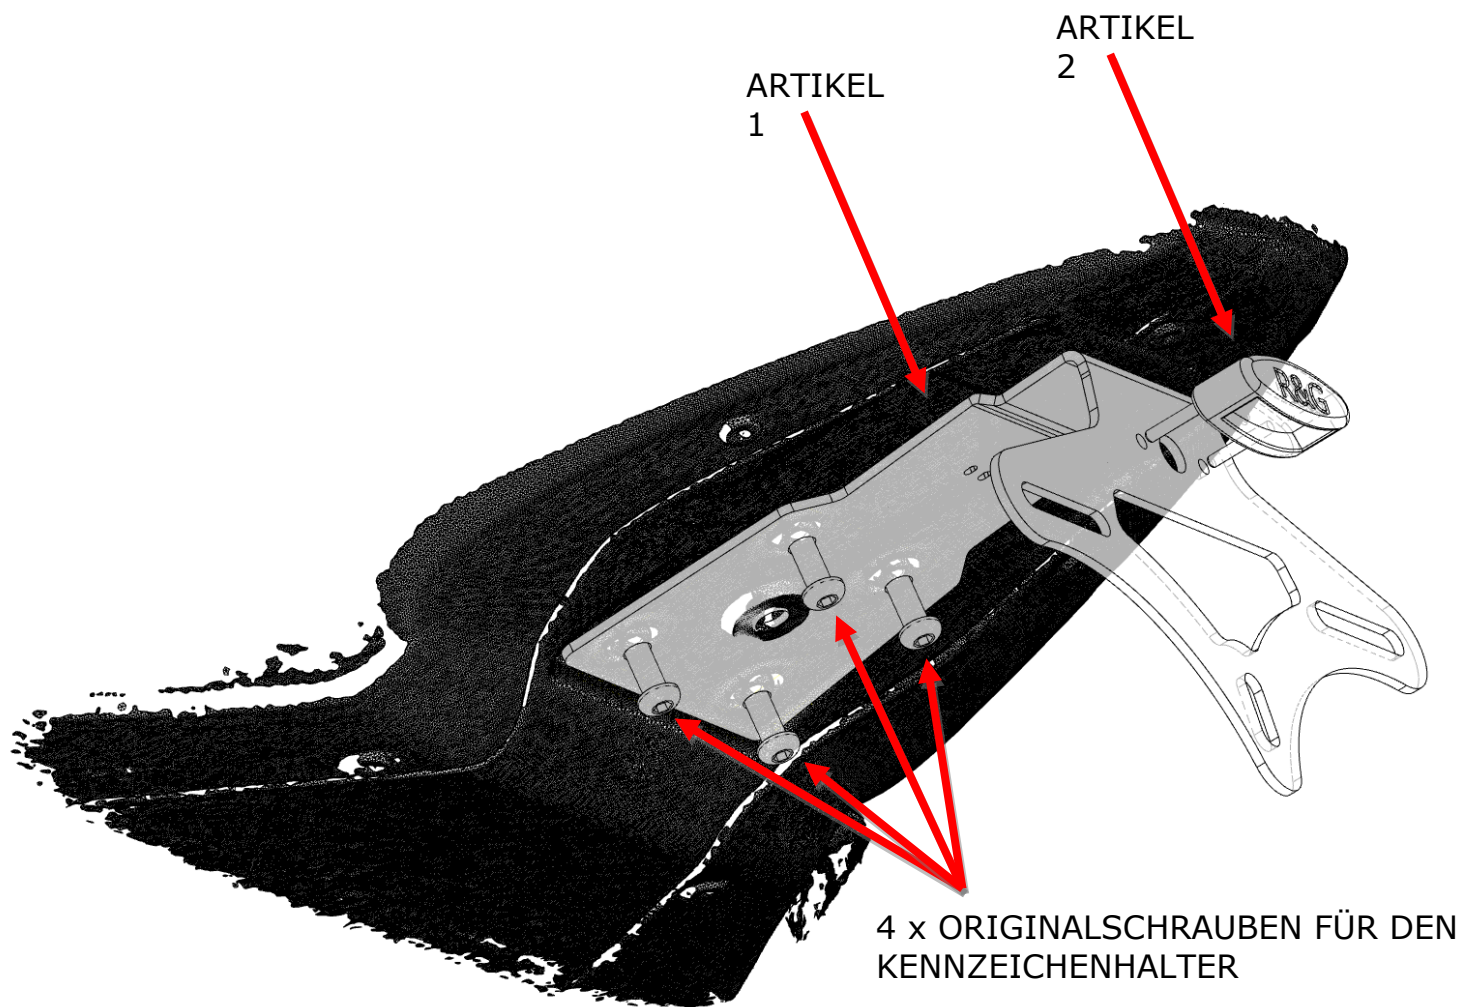




Abbildung 1



Abbildung 2

MONTAGEANLEITUNG

Entfernung des original Kennzeichenhalters

- Um den R&G Kennzeichenhalter montieren zu können, entfernen Sie zuerst den Soziussitz und den Fahrersitz. Verwenden Sie hierfür den Schlüssel – siehe **Abbildung 1**.
- Entfernen Sie nun den original Kennzeichenhalter und die Halterung, indem Sie die 4 Schrauben entfernen, die den Kennzeichenhalter an der Unterseite des Hecks befestigen.
- Nun wird der Kennzeichenhalter locker sein und das angeschlossene Kabel (für die Kennzeichenbeleuchtung) unter dem Sitz kann getrennt werden. Dieses Kabel wird später beim Einbau der neuen Einheit (**ARTIKEL 2**) wieder benötigt.

Montage des Kennzeichenhalters

- Den R&G Kennzeichenhalter an die original Montageöffnungen ansetzen, sodass der bündig angeschlossen ist wie in der **Zeichnung Zusammenbau** abgebildet.
- Den Kennzeichenhalter am Motorrad mit den 4 x Originalschrauben befestigen wie in **Abbildung 2** abgebildet.
- Das Kabel für die Kennzeichenbeleuchtung durch die Öffnung im Kennzeichenhalter und in den Freiraum unter dem Fahrersitz einfädeln – anschließend das Kabel mittels Kabelbinder an den Längslöchern am Kennzeichenhalter ordentlich fixieren.
- Die Kennzeichenbeleuchtung mit den Originalverbindungen wieder verbinden und die Funktion der Beleuchtung überprüfen, bevor Sie mit dem Motorrad fahren.
- **WICHTIG: WENN EIN GROSSES KENNZEICHEN ZU WEIT NACH UNTEN MONTIERT WIRD, BESTEHT BEI SCHWERER LAST ODER DURCH GROSSE BODENWELLEN EIN GERINGES RISIKO, DASS DAS KENNZEICHEN AN DAS HINTERRAD STOSSEN KANN. ES LIEGT IN IHRER VERANTWORTUNG DIES ZU ÜBERPRÜFEN UND, WENN NOTWENDIG, VORBEUGENDE MASSNAHMEN ZU ERGREIFEN. DIE NICHTBEACHTUNG DIESER SICHERHEITSHINWEISES KANN ZU SCHWEREN VERLETZUNGEN FÜHREN.**



- Entsprechend der gesetzlichen Vorschriften, den mitgelieferten Rückstrahler (**ARTIKEL 7**) an die dafür vorgesehene Stelle anbringen.
- Überprüfen Sie die Funktion der kompletten Beleuchtung nochmal, bevor Sie mit dem Motorrad fahren.

AUSGABE 1 24/01/21 (AO)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.