




FITTING INSTRUCTIONS FOR RAD0368PRO

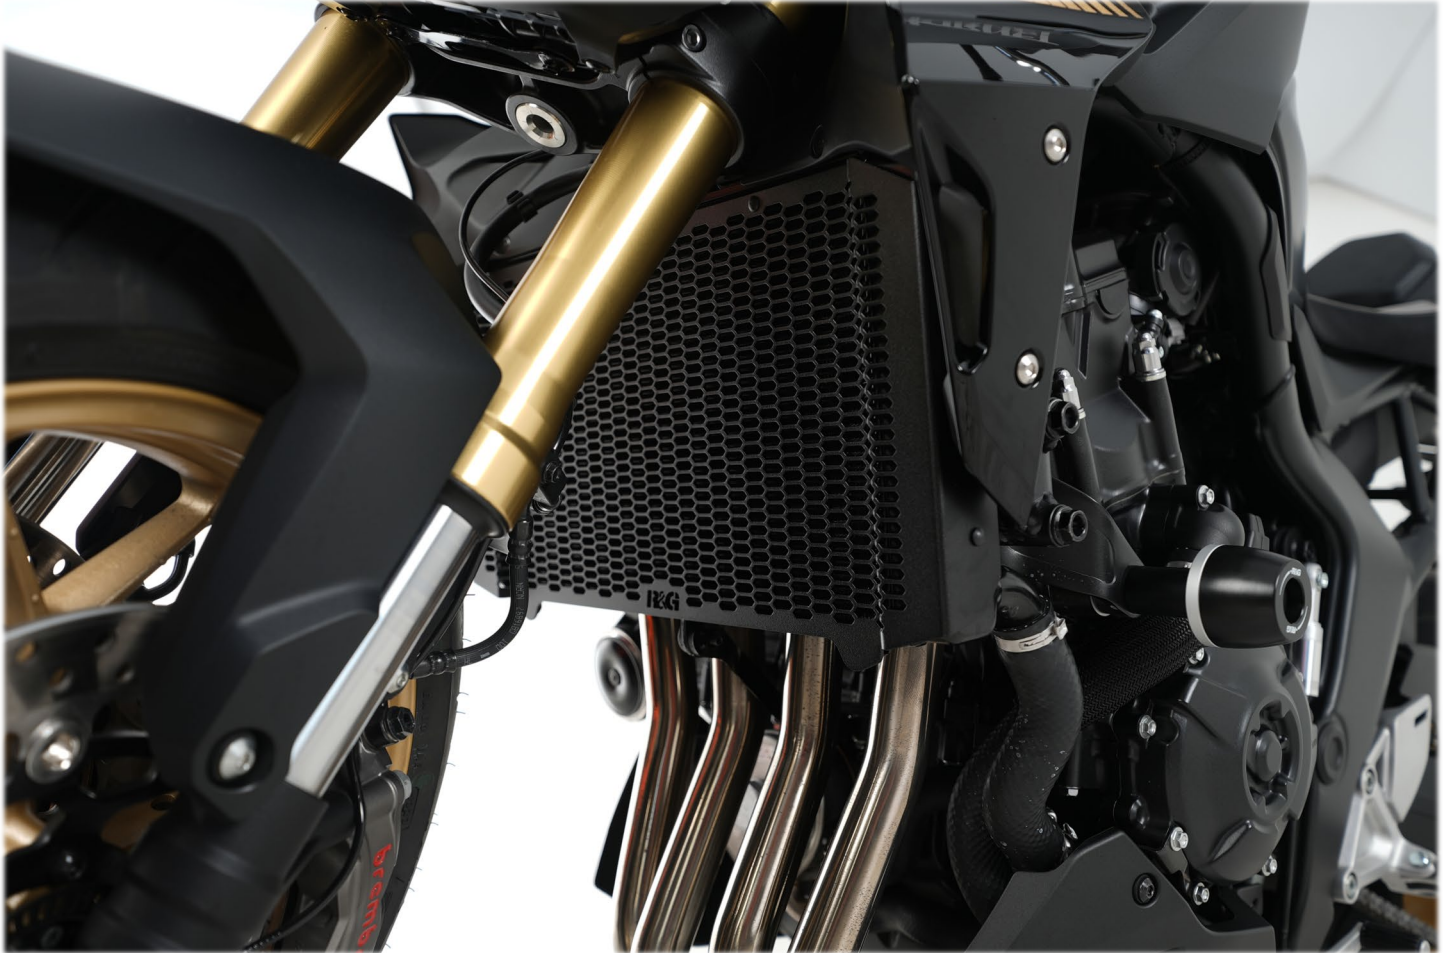

THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS
OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE WAY OF
MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,
THESE RUBBER WASHERS CAN BE THROWN AWAY.




<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
• SET OF ALLEN KEYS • WIRE CUTTERS	M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm M8 BOLT = 20Nm M10 BOLT = 40Nm M12 BOLT = 40Nm

LEGEND

ITEM NO.	DESCRIPTION	QTY
ITEM 1	RAD0368PRO RADIATOR GUARD	1
ITEM 2	RUBBER BUNG	8

FITTING DIAGRAM


FRONT OF RAD GUARD

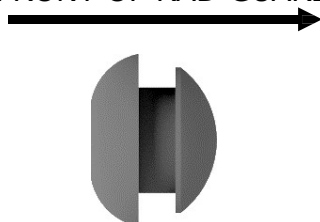




FITTING PICTURES


Picture 1

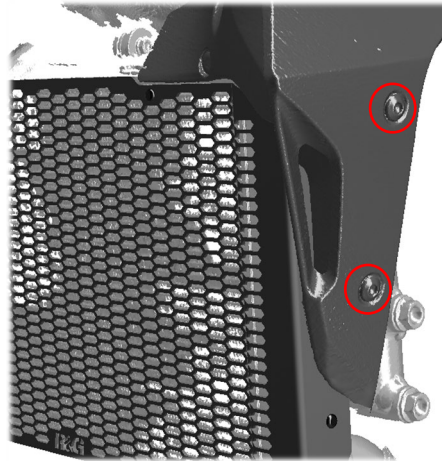

Picture 2

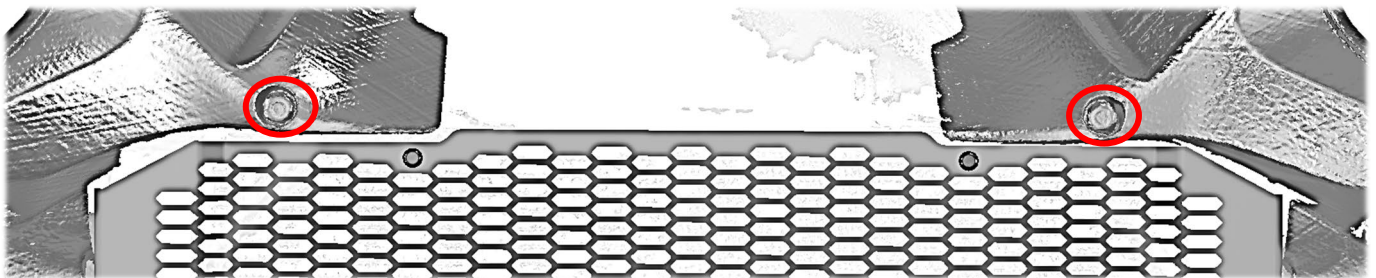


Picture 3

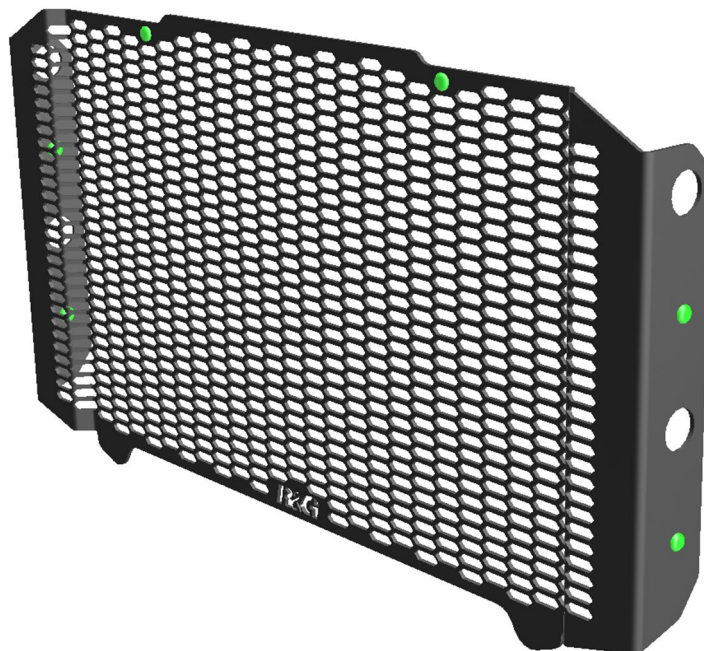





Picture 4

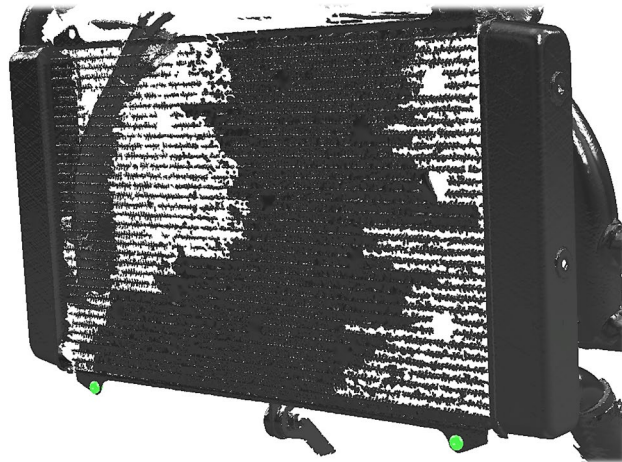

Picture 5

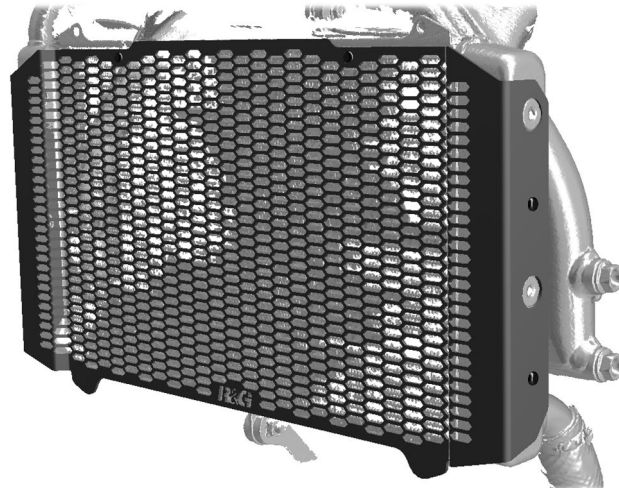

Picture 6

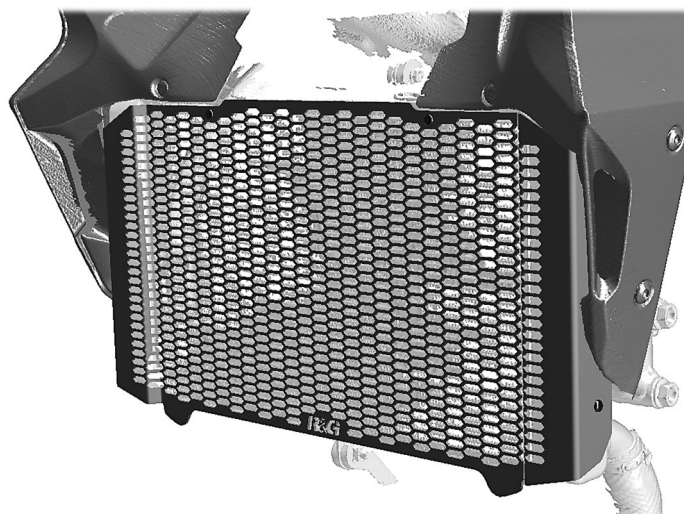



FITTING INSTRUCTIONS

- Firstly, remove the two side pods and infill panels via the 4X mounting bolts marked in **Picture 1** and the 2X pop clips parked in **Picture 2**.
- Carefully clean the radiator, being careful not to damage any of the fins.
- Prepare the radiator guard by inserting the 6x rubber bungs into the radiator guard as shown in **Picture 3**.

Please note: *Fitting the bungs is much easier with the use of a 3mm allen/hex key, place the bungs on the end of the allen key and carefully push through the holes.*

- Insert the 2X remaining rubber bungs into the tabs on the bottom edge of the radiator as shown in **Picture 4**.
- Offer the radiator guard up to the bike, hooking either the left- or right-hand side around the tank, slotting the bosses into the larger holes on the side faces on the radiator guard.
- Then carefully bending the opposing side out and around the bosses on the other tank.
- Re-fit the side pods and infill panel.

ISSUE 1 – 14/04/2025 (TB)

CONSUMER NOTICE


The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



NOTICE DE MONTAGE POUR RAD0368PRO

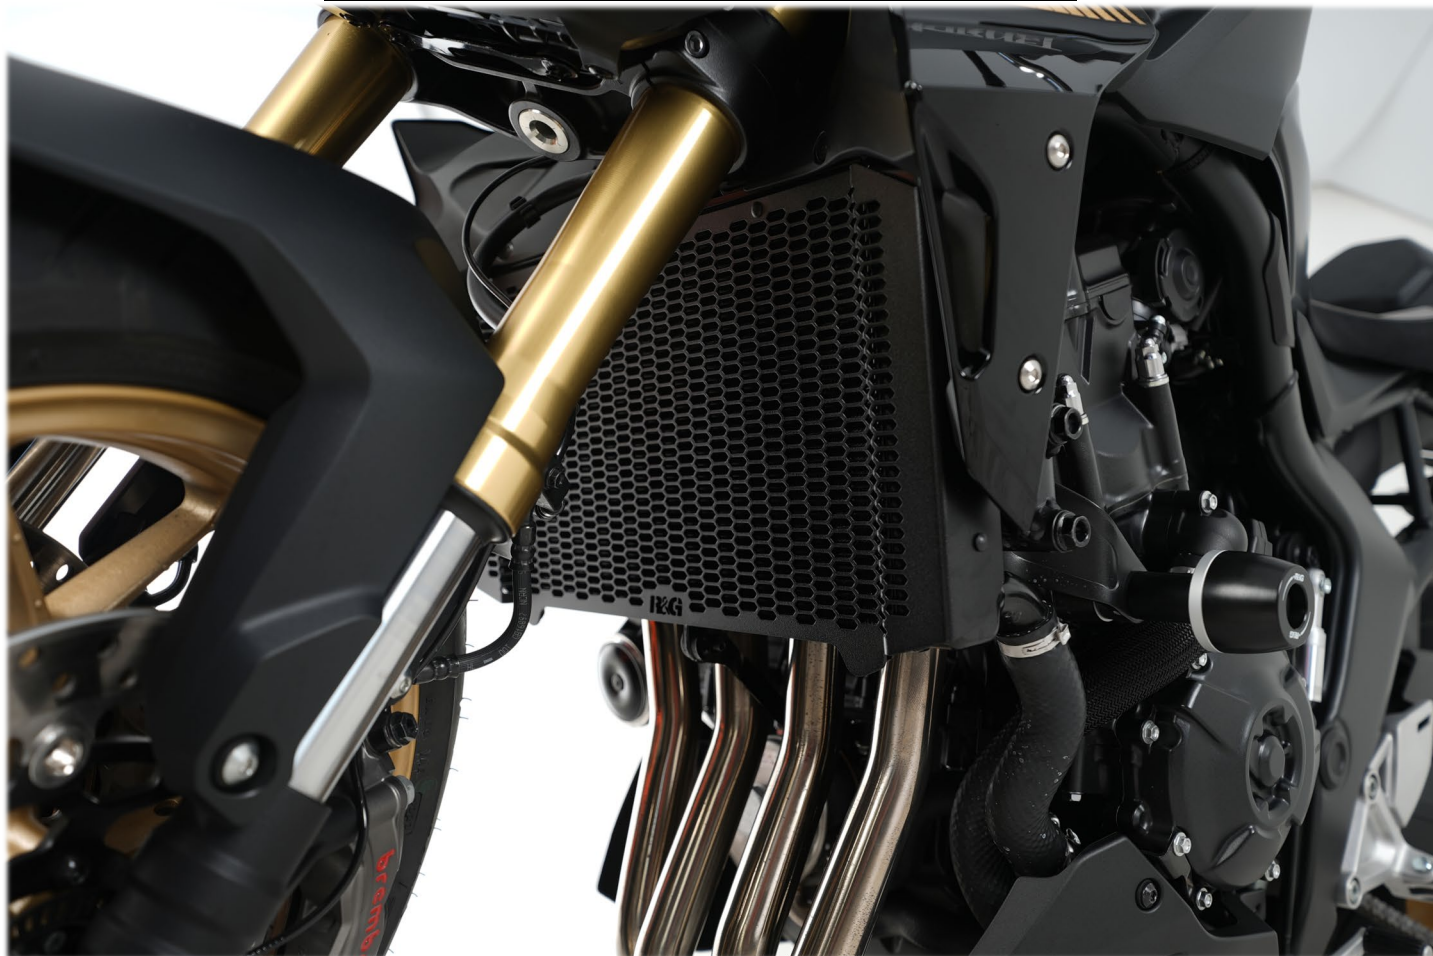

CE KIT CONTIENT LES ARTICLES ILLUSTRÉS ET ÉTIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ÊTRE PRÉSENTES UNIQUEMENT POUR LA CLARTÉ DES INSTRUCTIONS.

NE PAS PROCÉDER AU MONTAGE TANT QUE VOUS N'ÊTES PAS SÛR QUE TOUTES LES PIÈCES SOIENT PRÉSENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

**EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ UN DE NOS
REVENDEURS OU FAITES APPEL À UN TECHNICIEN QUALIFIÉ.**

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLÉ NE REPRÉSENTE PAS NECESSAIREMENT LA MANIÈRE DE
LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISÉES POUR MAINTENIR LES COMPOSANTS SUR LES BOULONS,
ELLES PEUVENT ÊTRE JETÉES.

NOTICE DISPONIBLE AU TÉLÉCHARGEMENT SUR :
WWW.RG-RACING.COM




<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE</u>
• CLÉS ALLEN • COUPE CÂBLE	M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm M12 BOULON = 40Nm

LÉGENDE

ARTICLE NO.	DESCRIPTION	QTÉ
ARTICLE 1	RAD0368PRO PROTECTION RADIATEUR	1
ARTICLE 2	BOUCHON EN CAOUTCHOUC	8

SCHÉMA DE MONTAGE

AVANT DE LA PROTECTION





PHOTOS DE MONTAGE

Photo 1

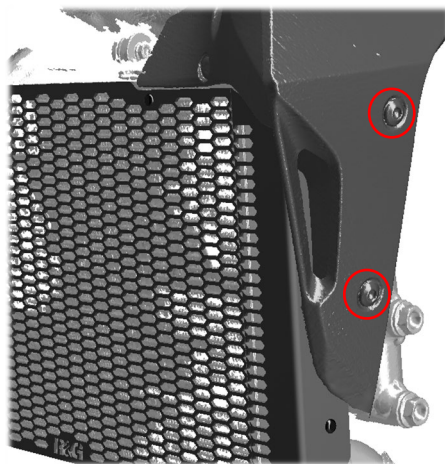


Photo 2

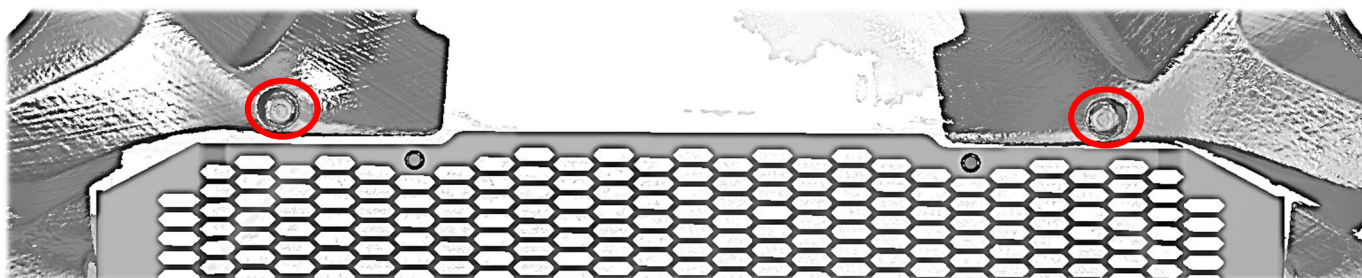


Photo 3

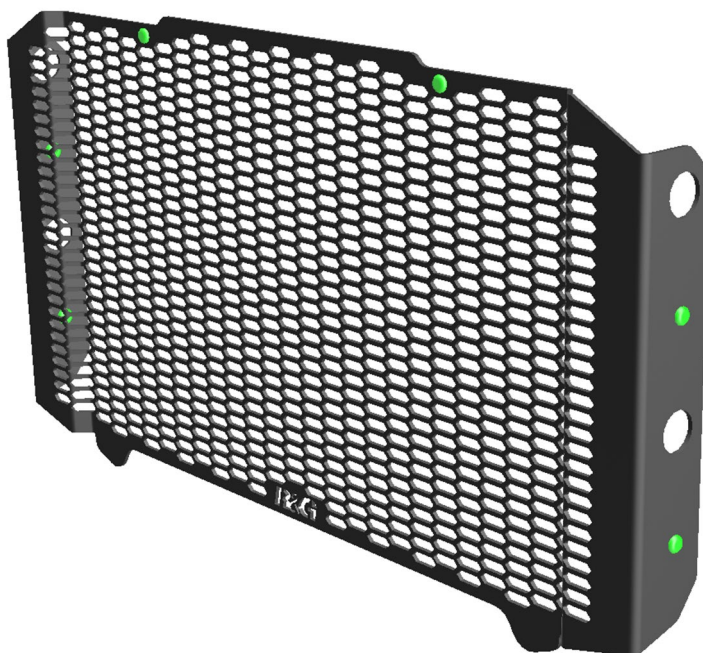




Photo 4

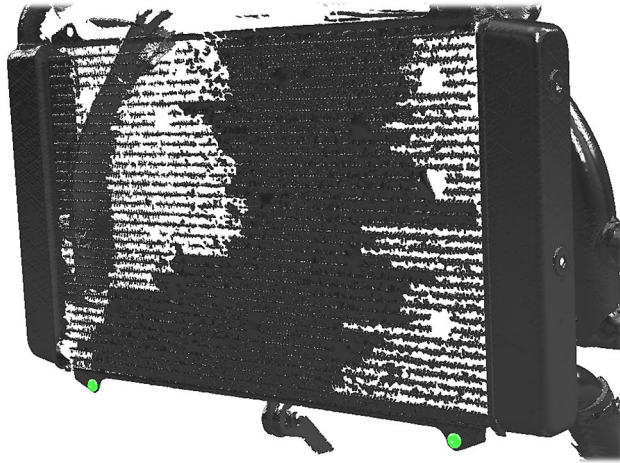


Photo 5


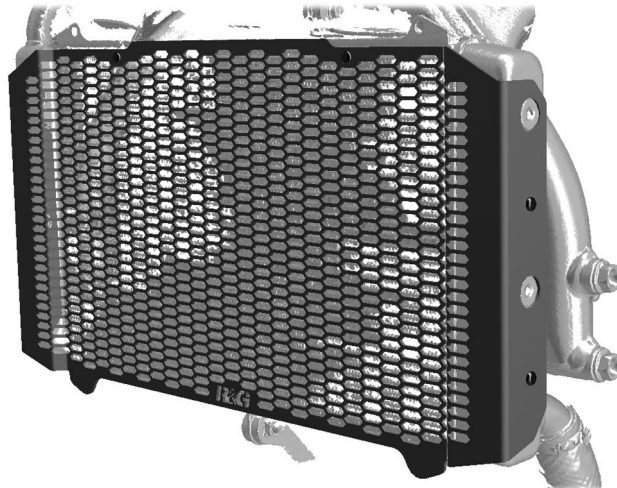


Photo 6



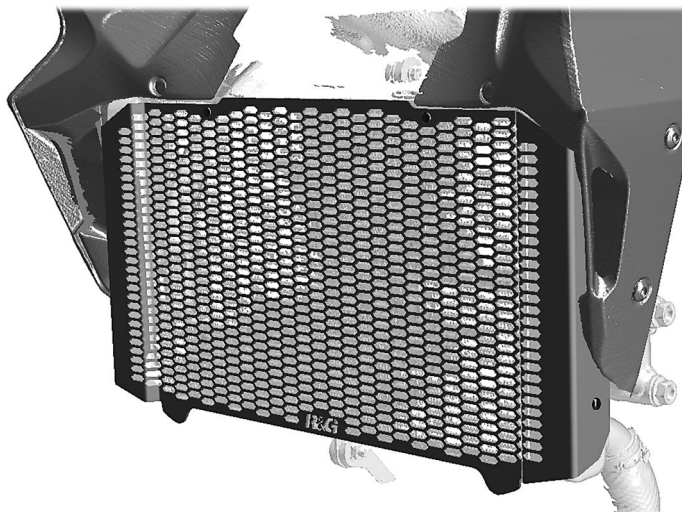

NOTICE DE MONTAGE

- Commencez par retirer les deux coques latérales et les panneaux de remplissage à l'aide des 4 boulons de fixation indiqués sur la photo 1 et des 2 clips de fixation indiqués sur la photo 2.
- Nettoyez soigneusement le radiateur en veillant à ne pas endommager les ailettes.
- Préparez la protection radiateur en insérant les 6 bouchons en caoutchouc dans celle-ci, comme illustré sur la photo 3.
- Note : la mise en place des bouchons est beaucoup plus facile avec une clé Allen/Hexagonale de 3 mm. Placez les bouchons à l'extrémité de la clé Allen et insérez-les délicatement dans les trous.
- Insérez les 2 bouchons en caoutchouc restants dans les languettes situées sur le bord inférieur du radiateur, comme illustré sur la photo 4.
- Présentez la protection radiateur à la moto, en accrochant le côté gauche ou droit autour du réservoir, puis en insérant les bossages dans les trous les plus larges situés sur les faces latérales de la protection radiateur.
- Pliez ensuite délicatement le côté opposé vers l'extérieur et autour des bossages de l'autre réservoir.
- Remonter les modules latéraux et le panneau de remplissage.

ISSUE 1 – 14/04/2025 (TB)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.