



**Fitting Instructions for RGH0022BK Rear Hugger**  
**YAMAHA MT-09 2017-**



**In This Kit There Should Be**  
**1x Rear Hugger (RGH0022BK)**  
**1 x S0230 Spacer**



Picture 1



Picture 2




Picture 3



Picture 4



Picture 5

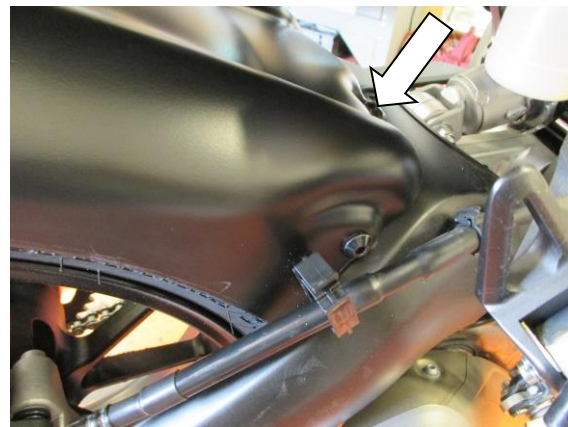

Picture 6

### TOOLS REQUIRED

- Socket set to include 5mm A/F socket & wrench.

### FITTING INSTRUCTIONS

- Remove the OEM hugger from the bike by removing the three bolts that secure it in place, as shown in pictures 1 & 2, ensuring to remove the rear brake hose from the plastic hose guide by un-clipping it.
- With the OEM hugger off the bike, remove the plastic hose guide by squeezing the prongs on the rear allowing it to be removed from the hole, as shown in picture 3.
- Take the R&G Hugger and re-fit the plastic hose guide to the larger of the two holes on the right side of the hugger, as shown in picture 4.
- Offer the hugger up to the bike and re-fit the three original bolts as shown in picture 5 (*please note you will have to use the supplied spacer between the new hugger and the swing-arm in position arrowed in pictures 5 and 6*). Loosely tighten at this stage to ensure the hugger is correctly positioned centrally on the rear wheel and has adequate clearance on the top and sides of the tyre. The three bolts can now be tightened.
- Locate the rear brake hose through the plastic hose guide before fixing the clip together, as shown in picture 6.

ISSUE 1 29/07/2019 (NSY)

**Digital copies of these instructions are available to download from [www.rg-racing.com](http://www.rg-racing.com)**

### CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect.

Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

#### **R&G RACING RETURNS POLICY (NON-FAULTY GOODS)**

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)





**Instructions de montage pour RGH0022BK Garde Boue**  
**YAMAHA MT-09 2017-**



**Le kit doit contenir :**  
**1x Garde Boue (RGH0022BK)**  
**1 x S0230 Entretoise**



Photo 1



Photo 2

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



Photo 3



Photo 4



Photo 5



Photo 6

#### Outils requis

- Jeu de clés 5mm.

#### INSTRUCTIONS DE MONTAGE :

- Enlever le Garde boue d'origine en enlevant les 3 boulons qui le fixent en place, comme indiqué sur les photos 1 & 2, en veillant à bien enlever le flexible de frein arrière du guide plastique de tuyau en le déclipant.
- Une fois le Garde boue enlevé, enlevez le qui , retirer le guide de tuyau en plastique en comprimant les griffes à l'arrière, lui permettant d'être extrait du trou, comme sur la photo 3.
- Prendre le Garde boue R&G et remettez le guide de tuyau en plastique sur le plus large des 2 trous du coté droit du Garde boue, comme sur la photo 4.
- Mettre le Garde boue sur la moto et remettez les 3 boulons d'origine comme sur la photo 5 (*s'il vous plaît noter que vous devrez utiliser l'entretoise fournie entre le nouveau et l'hugger bras oscillant en position fléché en images 5 et 6*). Serrer légèrement à ce stade pour veiller à ce que le Garde boue soit correctement positionné au centre sur la roue arrière et conserve un écart adéquat avec le haut et les bords du pneu. Les 3 boulons peuvent à présent être serrés.
- Placer le flexible de frein arrière à travers le guide de tuyau en plastique avant de fixer les clips ensemble, comme sur la photo 6.

ISSUE 1 29/07/2019 (NSY)

**Ces instructions de montage sont disponibles au téléchargement sur [www.rg-racing.com](http://www.rg-racing.com)**

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ  
 Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



#### CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect.

Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

#### R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)





**Montageanleitung für den RGH0022BK Hinterradkotflügel**  
**YAMAHA MT-09 2017-**



**Dieser Kit enthält:**  
**1x Hinterradkotflügel (RGH0022BK)**  
**1 x S0230 Abstandshalter**



Abbildung 1

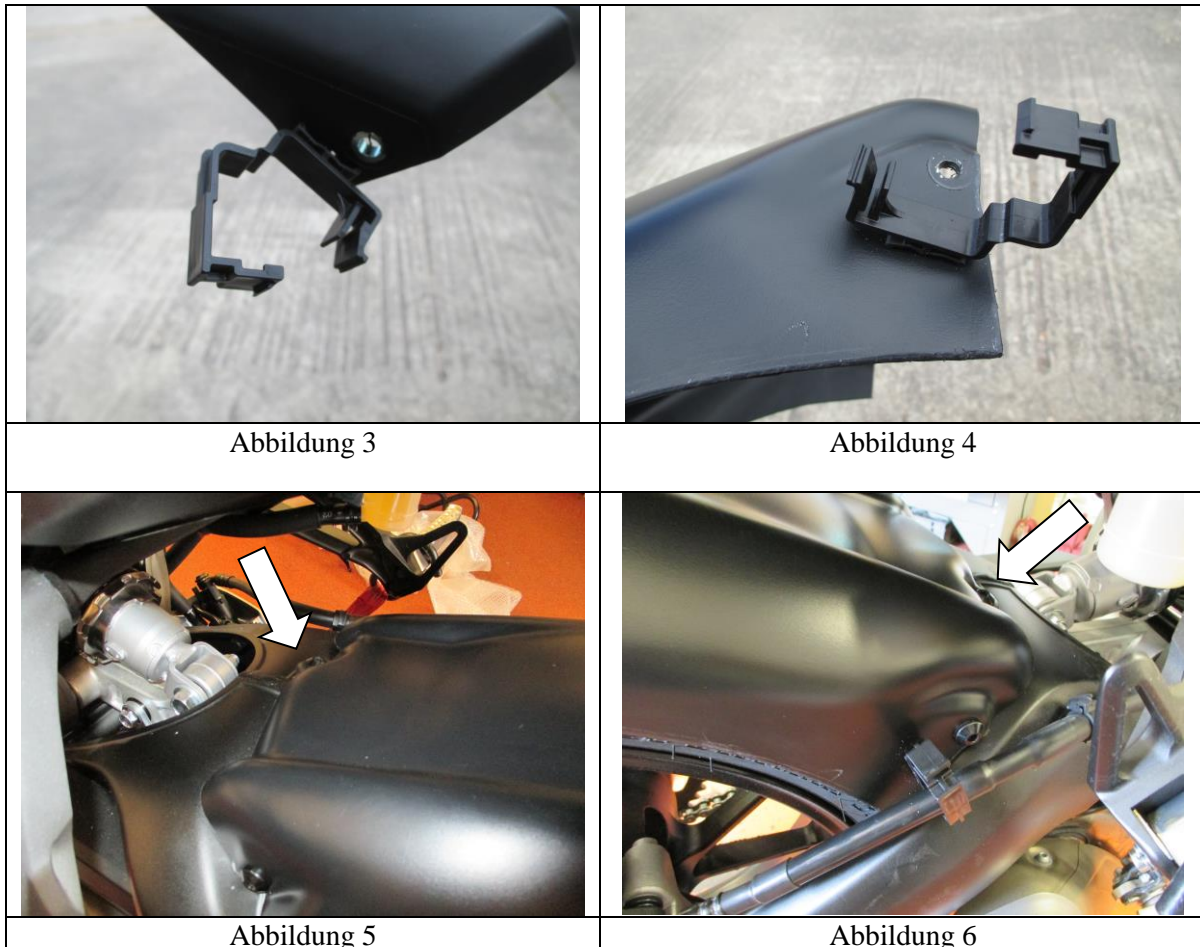


Abbildung 2

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



### **SIE BENÖTIGEN FOLGENDES WERKZEUG**

- Steckschlüsselsatz inkl. 5mm Steckschlüssel

### **MONTAGEANLEITUNG:**

- Entfernen Sie den originalen Hinterradkotflügel vom Motorrad indem Sie die drei Schrauben entfernen, die ihn in Position befestigen – siehe Abbildungen 1 & 2. Bitte darauf achten, dass Sie den hinteren Bremsschlauch aus der Plastikschauchführung lösen.
- Wenn der Hinterradkotflügel demontiert ist, entfernen Sie die Plastikschauchführung (drücken Sie die hinteren Haken zusammen, um sie aus der Öffnung entfernen zu können) - siehe Abbildung 3.
- Nehmen Sie den R&G Hinterradkotflügel und montieren Sie die Plastikschauchführung an der größeren Öffnung auf der rechten Seite des Hinterradkotflügels – siehe Abbildung 4.
- Den Hinterradkotflügel am Motorrad ansetzen und die drei Originalschrauben wie in Abbildung 5 abgebildet anbringen (*bitte beachten Sie, dass der mitgelieferte Abstandshalter zwischen dem neuen Hinterradkotflügel und der Schwinge montiert werden muss* – siehe Abbildungen 5 & 6. Die Schrauben erst lose fixieren, um zu überprüfen, dass der Hinterradkotflügel mittig am Hinterreifen positioniert ist und ausreichend Abstand zum Reifen oben und an der Seite vorhanden ist. Die drei Schrauben können anschließend festgeschraubt werden.
- Den hinteren Bremsschlauch in der Plastikschauchführung anbringen und mit dem Clip befestigen, siehe Abbildung 6.

AUSGABE 1 29/07/2019 (NSY)

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)





**Eine digitale Version dieser Montageanleitung kann auf folgender Seite heruntergeladen werden:**  
[www.rg-racing.com](http://www.rg-racing.com)

#### CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

#### R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)