




**FITTING INSTRUCTIONS FOR FP0103BK FORK PROTECTORS  
DUCATI DIAVEL 2011**



**PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE WAY OF MOUNTING TO THE BIKE**

- Place the larger spacer into the RHS of the front wheel spindle.
- Push bar through the hollow spindle
- Place the smaller spacer into the LHS of the front wheel spindle
- Place black bobbins on each end of spindle bar
- Fit washer and nut loosely onto each end of the bar
- With a socket on either end, tighten until the assembly locks into place
- Do not overtighten – the nyloc nuts will hold it tight.

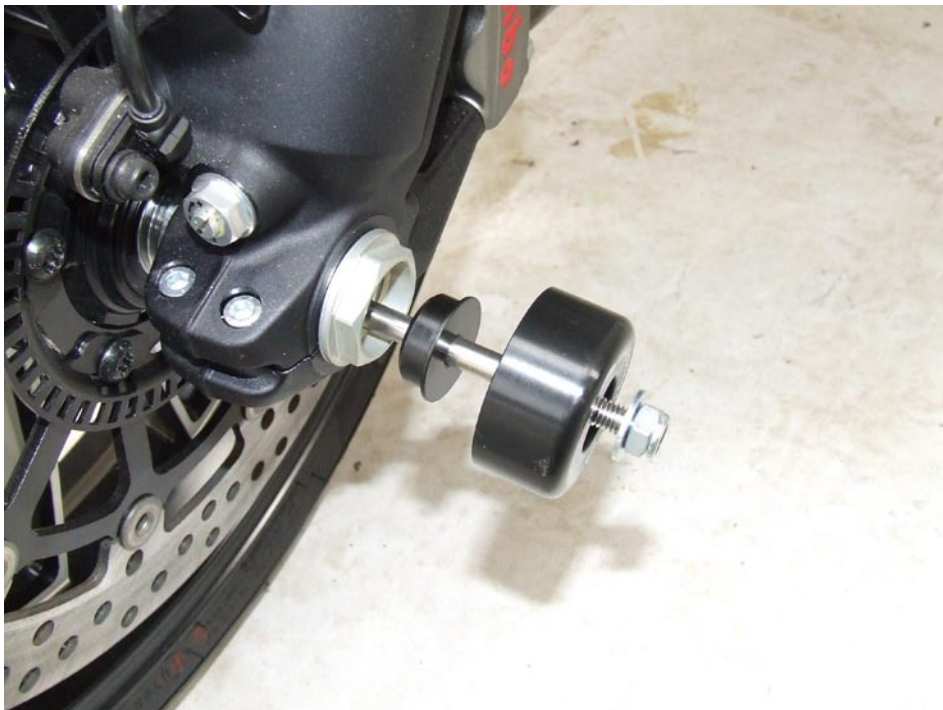

R&G Racing  
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ  
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



#### **CONSUMER NOTICE**

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

#### **R&G RACING RETURNS POLICY (NON-FAULTY GOODS)**

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



**FRANCE**  
**INSTRUCTIONS DE MONTAGE DE LA PROTECTION**  
**FP0103BK**  
**DUCATI DIAVEL 2011**

Merci de noter que les pièces assemblées dans l'emballage ne sont pas nécessairement dans le sens du montage à réaliser sur la moto.

- Placez l'entretoise la plus large dans le côté droit de l'axe de fourche.
- Placez l'entretoise la plus petite dans le côté gauche de l'axe de fourche .
- Glissez ensuite la barre R&G à travers les deux entretoises.
- Placez ensuite de chaque côté un tampon R&G sur l'axe R&G.
- Glissez une rondelle de chaque côté de l'axe (la rondelle sera positionnée contre le tampon)
- Vissez à la main un écrou autobloquant R&G de chaque côté de l'axe.
- A l'aide de deux clefs, serrez simultanément les deux écrous R&G
- Ne pas serrez trop fort, les écrous autobloquants garderont le système en place sur la moto.
- Vérifiez régulièrement la bonne tenue de la protection sur la moto.