



FITTING INSTRUCTIONS FOR CP0287 CRASH PROTECTORS
SUZUKI GSR750 2011



PICTURE ONE




PICTURE TWO

THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike


THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

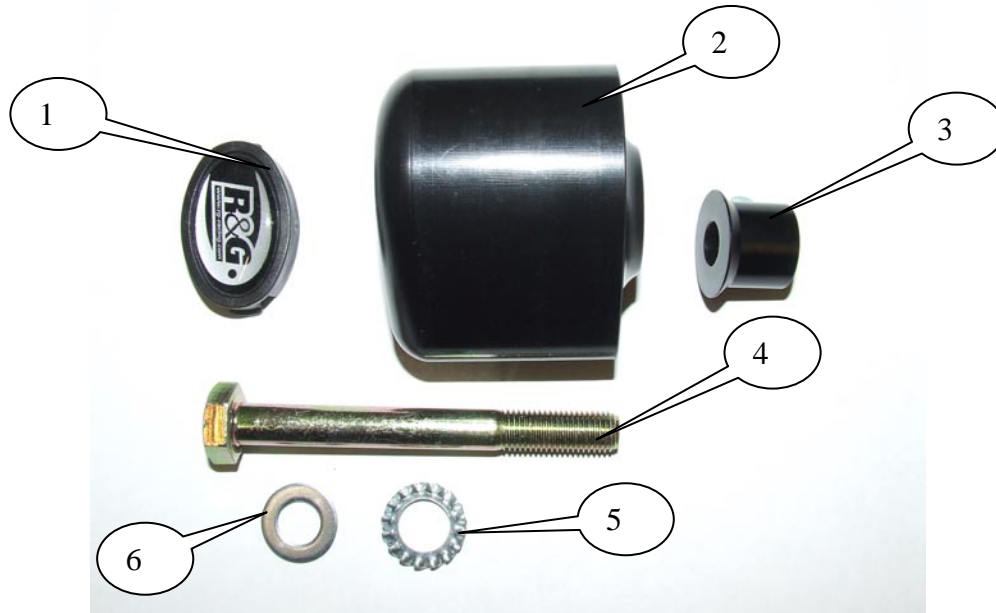

LEFT HAND SIDE



**THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.**

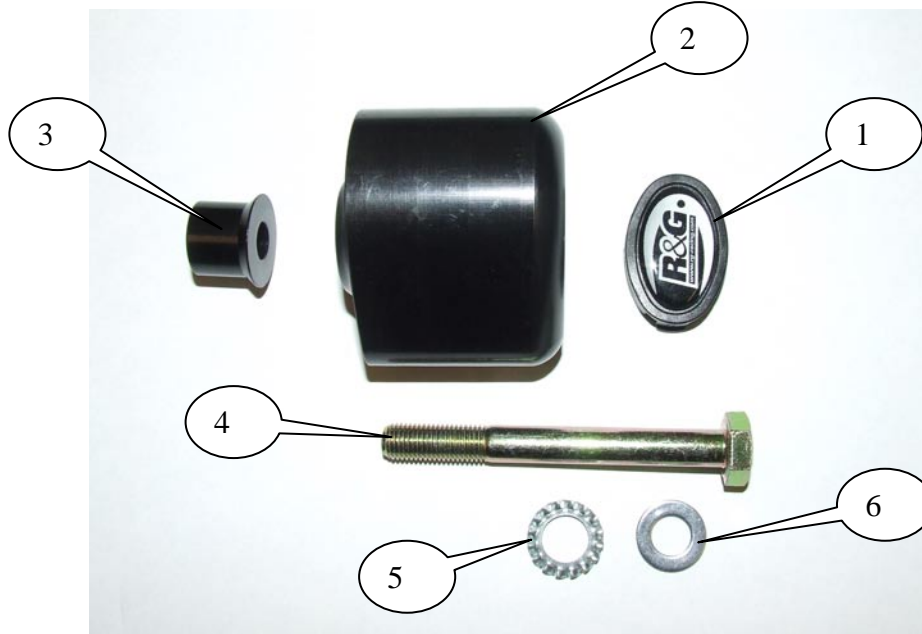

RIGHT HAND SIDE

LEGEND

- ITEM 1= PROTECTOR CAPS (BC0002) (x2).
- ITEM 2= PROTECTOR (B0063 WITH CS066) (x2).
- ITEM 3= SPACER LEFT AND RIGHT HAND SIDES (17.5mm LONG) (S0225) (x2).
- ITEM 4= M10x1.25x90mm LONG HEX HEAD BOLT (LEFT AND RIGHT HAND SIDES) (x2).
- ITEM 5= LOCK-WASHERS (LW0001) (x2).
- ITEM 6= M10 PLAIN WASHERS (x2).

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

TOOLS REQUIRED

- Socket set to include 14 and 17mm socket and wrench.
 - Torque wrench (up to 40Nm).



PICTURE THREE

Left-hand side (as you sit on bike)

- Remove the engine-mounting bolt arrowed in picture ONE.
- Slide one of the 10mm washers (item 6) onto one of the M10 hexagon headed bolt (item 4) so washer sits against head of bolt.
- Slide serrated locking washer (item 5) over the bolt so it sits against the washer just fitted.
- Next slide bolt and washers through either crash protector (item 2) so head of bolt goes into counter-bore in the crash protector.
- Next slide one of the spacers (item 3) (17.5mm long) over bolt so it sits against the crash protector with the larger diameter against the crash protector (the amount of bolt protruding from spacer should be the same as the original engine mounting bolt).
- Offer this assembly up to frame mount and tighten bolt until you feel some compression from inside the protector using a 17mm socket and wrench. **PLEASE NOTE THE CRASH PROTECTOR MUST BE POSITIONED AS IN PICTURE THREE ABOVE WITH BIGGER END TOWARD FRONT OF BIKE.** Turn a little more so that you feel the compression increase slightly. Then apply a quarter turn. Do not over-tighten as damage can occur to the bike. Do not exceed 40nm of torque.
- If not already fitted fit bubble sticker into recess of the crash protector cap (item1).
- Fit the crash protector cap into the crash protector.

RIGHT-HAND SIDE (AS YOU SIT ON BIKE)

- Remove the engine-mounting bolt arrowed in picture ONE.
- Slide one of the 10mm washers (item 6) onto one of the M10 hexagon headed bolt (item 4) so washer sits against head of bolt.
- Slide serrated locking washer (item 5) over the bolt so it sits against the washer just fitted.
- Next slide bolt and washers through either crash protector (item 2) so head of bolt goes into counter-bore in the crash protector.
- Next slide one of the spacers (item 3) (17.5mm long) over bolt so it sits against the crash protector with the larger diameter against the crash protector (the amount of bolt protruding from spacer should be the same as the original engine mounting bolt).
- Offer this assembly up to frame mount and tighten bolt until you feel some compression from inside the protector using a 17mm socket and wrench. **PLEASE NOTE THE CRASH PROTECTOR MUST BE POSITIONED AS IN PICTURE THREE ABOVE WITH BIGGER END TOWARD FRONT OF BIKE.** Turn a little more so that you feel the compression increase slightly. Then apply a quarter turn. Do not over-tighten as damage can occur to the bike. Do not exceed 40nm of torque.
- If not already fitted fit bubble sticker into recess of the crash protector cap (item1).
- Fit the crash protector cap into the crash protector.

ISSUE 1 19/05/2011 (NSY)

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



**INSTRUCTIONS DE MONTAGE POUR CP0287 CRASH PROTECTORS
SUZUKI GSR750 2011**




Image 1



Image 2

Verifier le contenu de la boite avant de deballer les pieces


**LA FACON DONT LE KIT EST EMBALLE NE REPRESENTE PAS NECESSAIREMENT LA FACON DE LE
MONTER SUR LA MOTO**

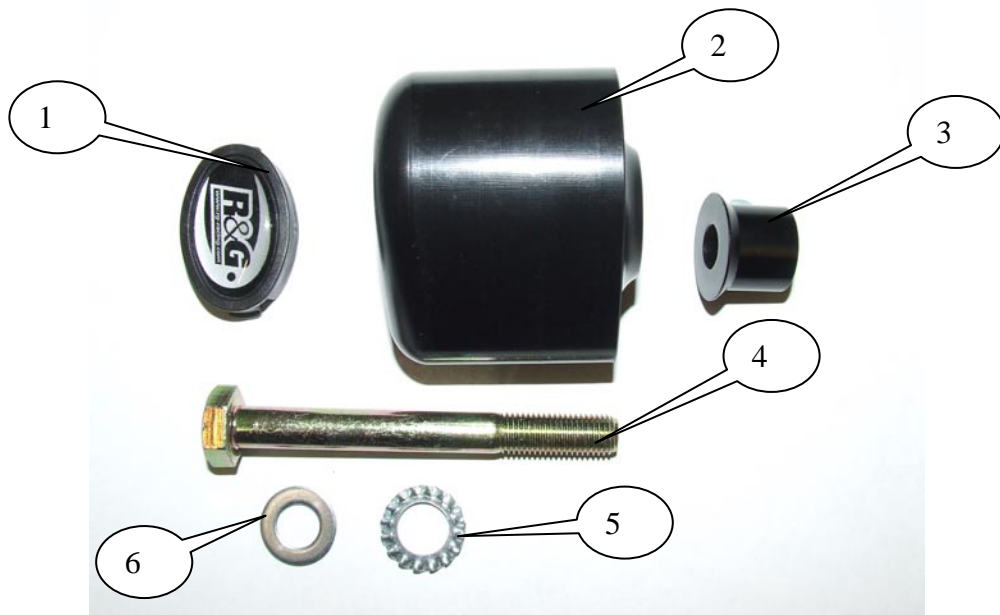

Cote gauche



Verifier le contenu de la boite avant de deballer les pieces

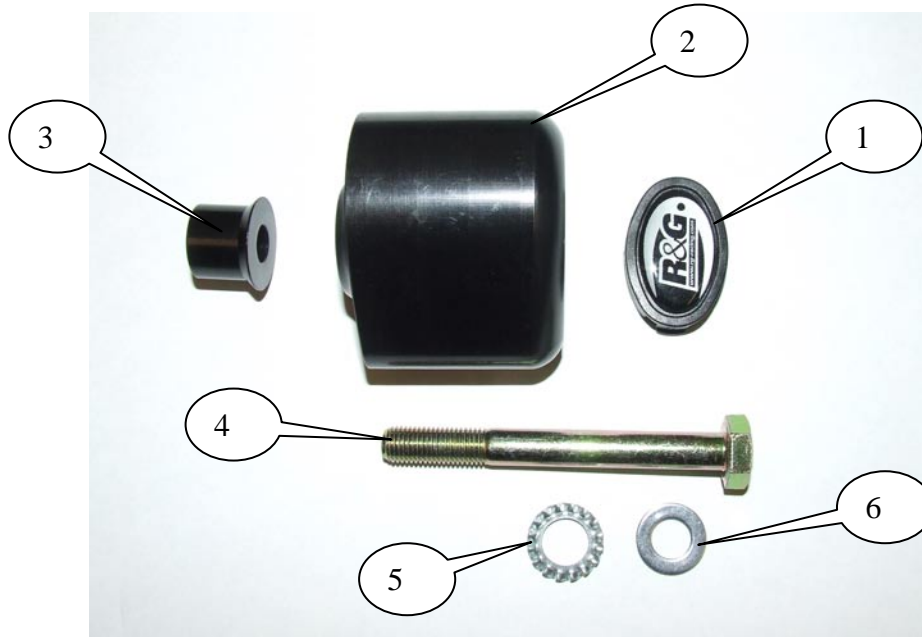

Cote droit

LEGENDE

ITEM 1= CAPUCHONS DE PROTECTION (BC0002) (x2).

ITEM 2= PROTECTION (B0063 WITH CS066) (x2).

ITEM 3= ENTRETOISES COTE GAUCHE ET COTE DROIT (longueur 17.5mm) (S0225) (x2).

ITEM 4= M10x1.25x90mm BOULON LONG TETE HEXAGONALE (COTE GAUCHE ET DROIT) (x2).

ITEM 5= RONDELLES DE BLOCAGE (LW0001) (x2).

ITEM 6= M10 RONDELLES PLATES (x2).

Notez que dans les cas où les kits sont emballés avec des rondelles en caoutchouc, composantes du boulon - les rondelles en caoutchouc doivent être jetées !

OUTILS REQUIS

- Jeu de douilles et clés de 14 et 17mm
Clé dynamométrique (jusqu'à 40Nm).



ARRIERE
MOTO



DEVANT
MOTO

PICTURE THREE

COTE GAUCHE

- Retirez le boulon de fixation du moteur (point 1).
- Faites glisser l'une des rondelles de 10mm (point 6) sur l'un des six pans M10 tête de boulon (point 4) afin que la rondelle se trouve sur la tête du boulon.
- Faites glisser la rondelle dentelée de verrouillage (point 5) sur le boulon de façon qu'il se trouve sur la rondelle tout équipé.
- Faites glisser le boulon et les rondelles suivantes (article 2) de manière a ce que la tête du boulon passe en contre-alésage dans le protection chute.
- Ensuite, glissez des entretoises (point 3) (17,5 mm de long) sur le boulon de sorte qu'il se trouve contre le protecteur crash avec le plus grand diamètre contre la protection chute (le montant de la vis dépassant de spacer devrait être le même que le moteur original de montage boulon).
- Offre cet ensemble jusqu'à la trame de montage et serrer la vis jusqu'à ce que vous sentez une certaine compression de l'intérieur du protecteur a l'aide d'une clé à pipe de 17mm. LA PROTECTION DE CHUTE doit être positionnée comme LA PHOTO 3 ci-dessus, vers le devant de la moto. Compresssez légèrement. Appliquez ensuite un quart de tour. Ne serrez pas trop car les dommages peuvent se produire à la moto. Ne pas dépasser 40 nm de couple.
- Si pas déjà équipé, encastrez le capuchon protecteur de crash (1).
- Mettre en place le capuchon protecteur avec le protecteur de l'accident.

COTE DROIT

- Retirez le boulon de fixation du moteur (point 1).
- Faites glisser l'une des rondelles de 10mm (point 6) sur l'un des six pans M10 tête de boulon (point 4) afin que la rondelle se trouve sur la tête du boulon.
- Faites glisser la rondelle dentelée de verrouillage (point 5) sur le boulon de façon qu'il se trouve sur la rondelle tout équipé.
- Faites glisser le boulon et les rondelles suivantes (article 2) de manière a ce que la tête du boulon passe en contre-alésage dans le protection chute.
- Ensuite, glissez des entretoises (point 3) (17,5 mm de long) sur le boulon de sorte qu'il se trouve contre le protecteur crash avec le plus grand diamètre contre la protection chute (le montant de la vis dépassant de spacer devrait être le même que le moteur original de montage boulon).
- Offre cet ensemble jusqu'à la trame de montage et serrer la vis jusqu'à ce que vous sentez une certaine compression de l'intérieur du protecteur a l'aide d'une clé à pipe de 17mm. LA PROTECTION DE CHUTE doit être positionnée comme LA PHOTO 3 ci-dessus, vers le devant de la moto. Compresssez légèrement. Appliquez ensuite un quart de tour. Ne serrez pas trop car les dommages peuvent se produire à la moto. Ne pas dépasser 40 nm de couple.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



- Si pas déjà équipé, encastrer le capuchon protecteur de crash (1).
- Mettre en place le capuchon protecteur avec le protecteur de l'accident.
-
- Fit the crash protector cap into the crash protector.

ISSUE 1 19/05/2011 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com